

8500 Balboa Boulevard, Northridge, CA
91329

DANTE MODULE v1.1.0 UPDATE INSTRUCTIONS

MARCH 13, 2020


Page 1 of 4

Overview

JBL Synthesis is releasing software version 1.1.0 for the DANTE module in the JBL Synthesis SDA-7120 & SDA-2200 for initial release.

Upgrading DANTE Firmware


1. In order to update the module the Audinate Firmware Update Manager which is included in the update package needs to be installed.
2. Connect the SDA-7120 or SDA-2200 to the network using the primary or secondary Dante Ethernet connections (NOT the ETHERNET connection).
3. Power on the unit.
4. Connect the PC to the same network as the JBL amplifier that is to be updated.
5. Run the Update Manager. When the updater opens click choose the Ethernet network interface and click next.

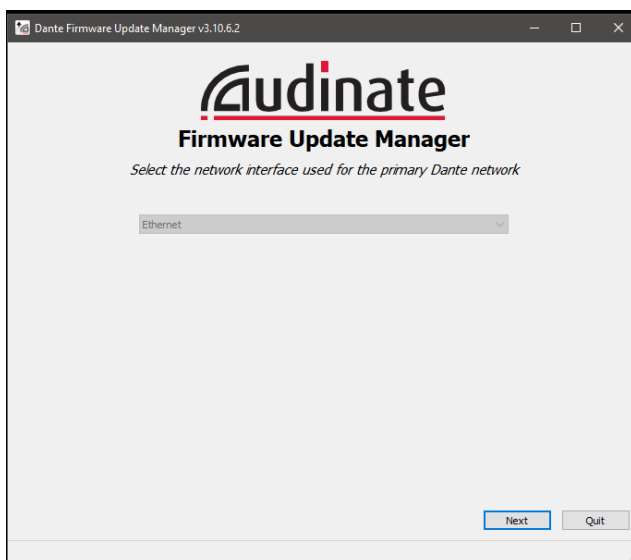

6. Click the Update DANTE Firmware option.

8500 Balboa Boulevard, Northridge, CA
91329**DANTE MODULE v1.1.0 UPDATE INSTRUCTIONS****MARCH 13, 2020**

Page 2 of 4

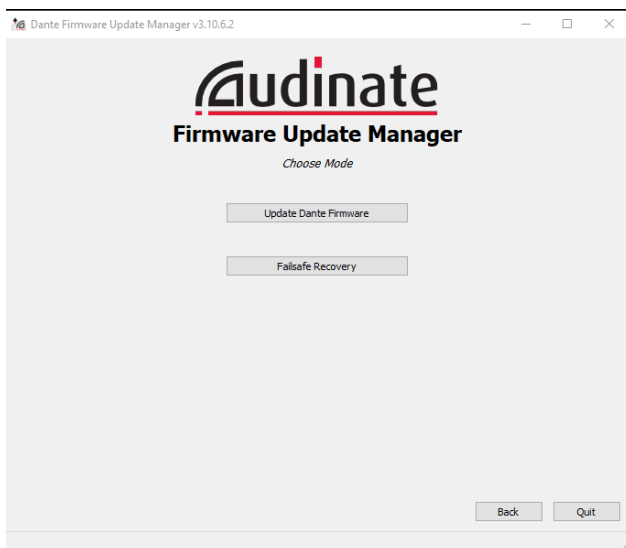


8500 Balboa Boulevard, Northridge, CA
91329

DANTE MODULE v1.1.0 UPDATE INSTRUCTIONS


MARCH 13, 2020

Page 3 of 4

7. Select the .dnt file that is included in the update package. Ensure the check box for “Override Device Matching” is checked.

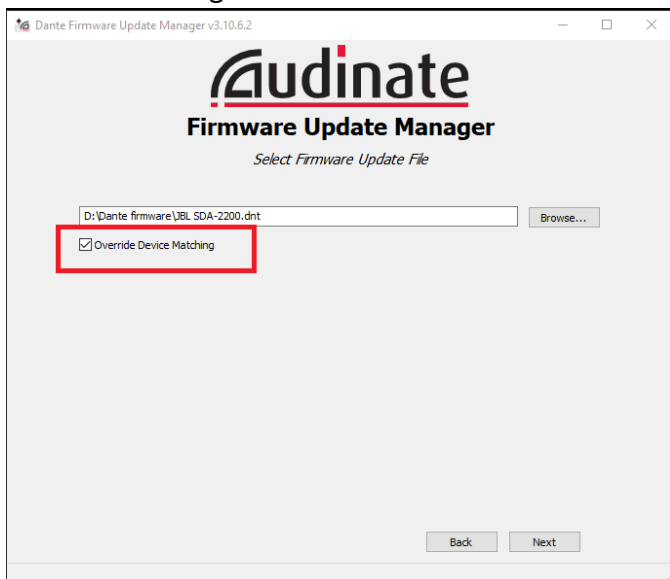

8. The updater will go and find all the DANTE products that are connected to the network. Select the product you wish to update and click start.

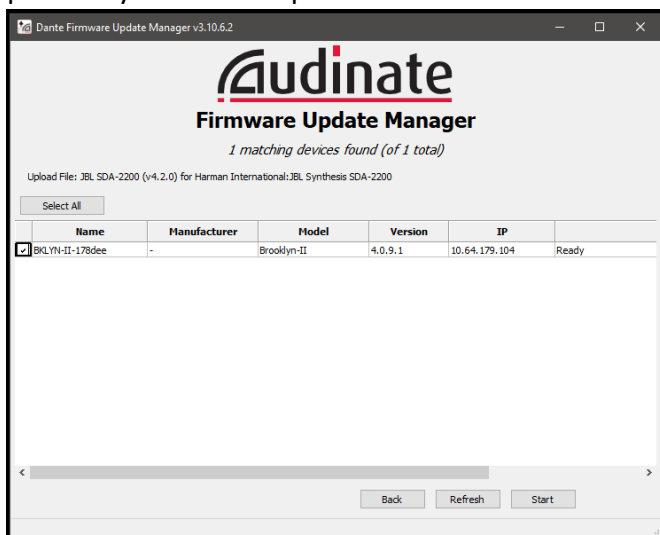



S Y N T H E S I S[®]

Phone 888-691-4171
Email CSupport@harman.com
Web www.jblsynthesis.com

TECHNICAL DOCUMENT

8500 Balboa Boulevard, Northridge, CA
91329

DANTE MODULE v1.1.0 UPDATE INSTRUCTIONS

MARCH 13, 2020

Page 4 of 4

9. Once complete you will be prompted to restart the product in order for the firmware to finish installing. Once power cycled the procedure is complete.